
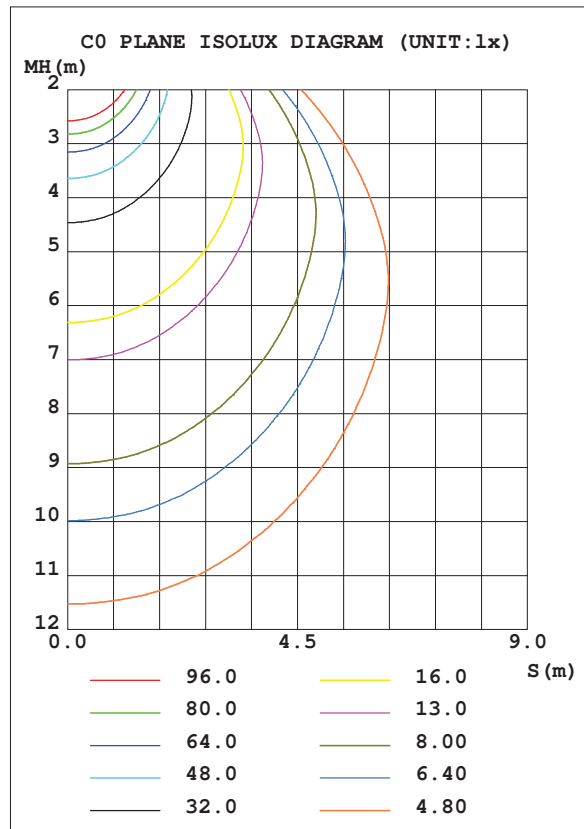


### LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:230.54V I:0.1801A P:40.407W PF:0.9730 Freq:49.99Hz Lamp Flux:5490x1 lm		
NAME: ARC-D SERIES	TYPE:LINEAR LIGHTING	WEIGHT:
SPEC.:NW, NICHIA	DIM.: 1200 x 60 x 56	SERIAL No.:4314
MFR.: K-LITE	SUR.:	Shielding Angle:105°

DATA OF LAMP		PHOTOMETRIC DATA			
MODEL	KL-3436	Imax (cd)	637.7	S/MH (C0/180)	1.36
NOMINAL POWER (W)	40	LOR (%)	32.8	S/MH (C90/270)	1.21
RATED VOLTAGE (V)	230	TOTAL FLUX (lm)	1799.3	η UP, DN (C0-180)	0.0, 16.4
NOMINAL FLUX (lm)	5490	CIE CLASS	DIRECT	η UP, DN (C180-360)	0.0, 16.4
LAMPS INSIDE	1	η up (%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE (V)	230	η down (%)	32.8	CIBSE SHR MAX	1.35

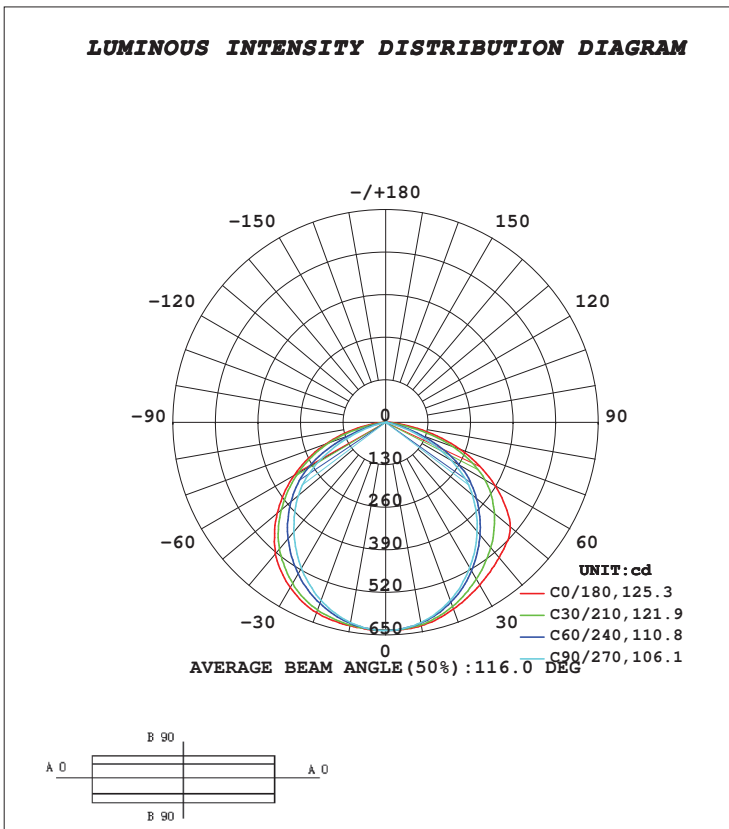

C Range: 0 - 360DEG  
 C Interval: 10.0DEG  
 Test Speed: HIGH  
 Temperature: 25.3DEG  
 Operators: K-LITE  
 Test Date: 16 March 2022

γ Range: 0 - 90DEG  
 γ Interval: 1.0DEG  
 Test System: EVERFINE GO-R5000\_V2 SYSTEM V2.00.417  
 Humidity: 65.0%  
 Test Distance: 1.825m [K=1.0000]  
 Remarks: