

K-LITE

INFINITY

Power : 36W
Length : Ø900mm

Upto
90
lm/w

Features

- Lumiled LED's
- CRI Ra>80
- SDCM ≤ 3
- L70 / B10 @ 59,000 Hrs
- Standard suspension kit 1M



Options

- CCT : 3000K / 4000K / 5700K
- Driver options



Beam Angle

BA120°

Diffused

Accessories




Canopy Kit for Dimmable options

K-LITE 90



Dimension in mm

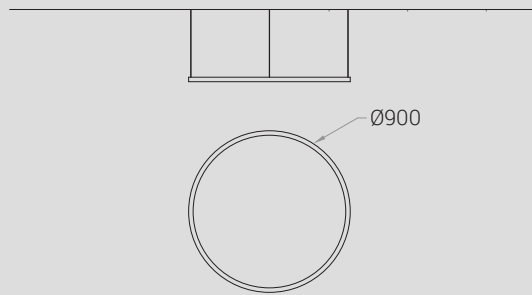

Housing Colour



Extruded aluminium with powder coated finish in
RAL9005 Black fine texture | RAL9016 White fine texture |
RAL9006 Grey fine texture



Open Source



Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 110-265Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Extruded Aluminium
Mounting	: Pendant
Finish	: Black / White / Grey

Light Source

Light Source	: Lumiled
CRI (Ra)	: >80
LED Colour Temperature	: 3000K / 4000K / 5700K

Driver

Power Supply	: Integrated
Power Factor	: >0.9
THD	: <10%
Surge Protection	: 3KV
Efficiency	: >85%

Optical

Tilt	: Fixed
Beam Angle	: 120°
Diffuser Material	: Translucent PC



Ordering Guide

Pendant

ID	Wattage	Dimension (mm)
3232	Upto 36W	Ø900 x 25