

LIVI surface mounted range of ceiling lights are a perfect fit for varied lighting applications. The aluminium housing is ideal for better thermal management. Different colour options available make this versatile for superior glare free indoor lighting solutions.

### Product Description

- Luminaire body made of die-cast aluminium effectively anti-rust treated both outer and inner finished with powder coating.
- Aluminium heat sink for better thermal management.
- Anti glare, uniform light distribution.
- Adopting reflector which is with excellent optics effect and excellent spot light effect.
- The lamp can be positioned at various angles for the directional light throw and rotatable in 360°.
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply.
- Suitable for operation on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-3676-CCT ( Colour Temperature )
- Available CCT : 2700-3000K, 4000K, 6000K.



### Product Benefits

- Quick & simple installation.
- Sturdy construction in order to maintain performance of the luminaire and to reduce maintenance costs.
- Flexible deployment options with a wide spectrum of applications.

### Area of Application

Lobbies & Foyers, Retail, Corridors, Residential, Receptions, Internal passages, Commercial & Business Centers.

### Available Finish

White epoxy polyester powder coating.





**Technical Specifications**

**General**

ID	: 3676
System Wattage	: 15W LED
COD	: Ø100
Driver Integral	: Constant Current
Input Voltage	: 230-240Vac
Frequency	: 50-60Hz
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

**Physical**

Body	: Die-Cast Aluminium
Diffuser	: Clear Polycarbonate
Mounting	: Ceiling Surface / Adjustable
Finish	: White epoxy polyester powder coating

**Light Source**


Light Source	: CITIZEN
LED Lumens	: 2250 lm
CRI (Ra)	: >80 (90 On Request)
LED Colour Temperature	: 3000K / 4000K / 6000K

**Driver**

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 3KV
Efficiency	: >84%
Dimmable options	: Triac / 1-10V / Dali

**Optical Performance**

Colour Temperature	: 3000K
Luminous flux	: 1493 lm
Beam Angle	: 38° (Adjustable)

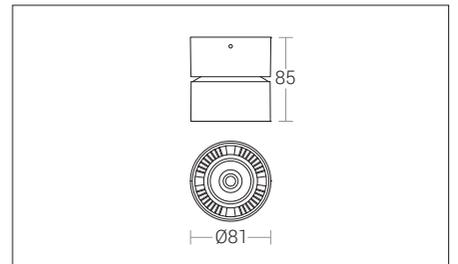





 >50,000 hrs  
 L70 B10 SDCM≤3  100-277V 50-60Hz

**Light Distribution**

