

Parula is delicate and graceful. Slender stem is topped with a hanging, Spherical shade that captures the bloom's languid look. Offered with one, two, three revolving arms, it resembles a solitary plant or grouping of flowers.

### Product Description

- Luminaire made of Aluminium tube with pressure die-cast aluminium housing.
- Clear toughened glass
- Mounting plate die cast aluminium double powder coat with an anchorage unit and stainless steel fixing screws.
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply
- CRI (Ra) :  $\geq 80$
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-4724-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 5700K



### Product Benefits

- Elegant, Robust design
- Corrosion resistant and Maintenance free.
- Dark sky compliant protects pedestrians from glare, in addition to preventing spill light above the horizontal plane.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

### Area of Application

Suitable for gated community and non-public / low density public areas.

### Available Finish

Pure polyester powder coated


RAL 9004 Signal black

RAL 9007 Grey aluminium

RAL 7016 Anthracite grey

Graphite grey



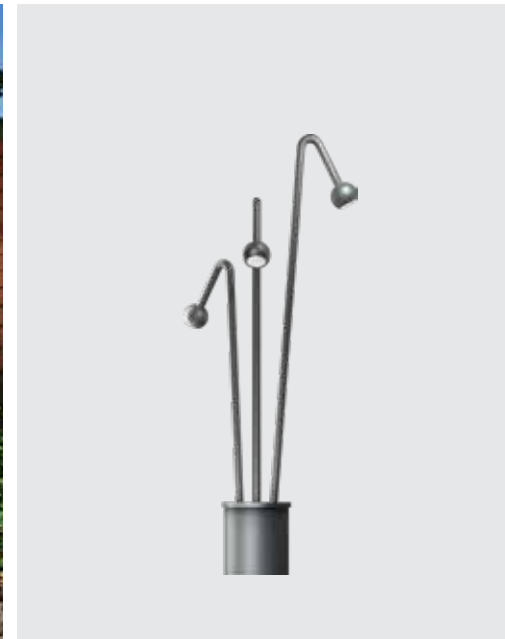

**Technical Specifications**

**General**

ID : 4724  
 System Wattage : 3 x 3W LED  
 Driver Integral : Constant Current  
 Operating Temperature : 100-277Vac  
 Operating Temperature : -15°C~+50°C

**Light Source**

Light Source : LUMILEDS / OSRAM  
 CRI (Ra) : >80  
 LED Colour Temperature : 2700K / 3000K / 4000K / 5700K

**Physical**



Body : Extruded Aluminium  
 Housing : Die-Cast Aluminium  
 Diffuser : Clear Toughened Glass  
 Mounting : Surface  
 Finish : Powder coated  
 RAL 9004 Signal black  
 RAL 9007 Grey aluminium  
 RAL 7016 Anthracite grey  
 Graphite grey

**Driver**

Power Supply : Integral  
 Input Voltage : 230-240Vac  
 Frequency : 50-60 Hz  
 Power Factor : >0.95  
 THD : <10%  
 Surge Protection : 3KV  
 Efficiency : >80%

**Optical Performance**

Light Distribution : Symmetrical

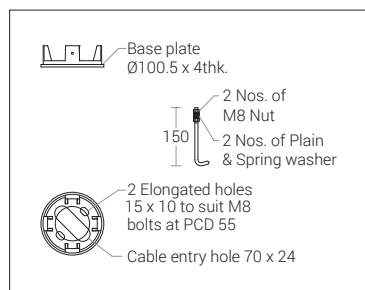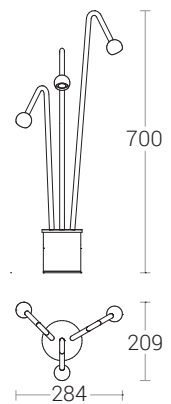

**Note :** It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at [www.klite.in](http://www.klite.in)