

Elegant lighting design, which is suitable for both modern and classic architecture. Ideal for creating visual guidance and exceptional visual comfort. These luminaires offer shielded glare free illumination of ground surface and are perfect for illuminating entrances, footpaths as well as garden and landscape architecture. Bollard luminaires contribute to safety by illuminating pathways and other open spaces.

Product Description

- Luminaire body made of square aluminium tube (grade 6063) with aluminium components and SS fasteners.
- For optimum coordination with lighting situation, these luminaires can be supplied in two different mounting heights.
- Clear toughened glass.
- Mounting plate die cast aluminium double powder coat with an anchorage unit and stainless steel fixing screws.
- Cable entries for through-wiring of mains supply cable.
- Integral constant current power supply
- CRI (Ra) : ≥ 80
- Prewired with LED driver and suitable for operating on 240V, 50Hz single phase ac supply.
- Ordering guide : KL-4710-CCT (Colour Temperature)
- Available CCT : 2700K, 3000K, 4000K, 6500K



Product Benefits

- High luminous efficiency at reduced wattage.
- Elegant, Robust design
- Corrosion resistant and Maintenance free.
- Dark sky compliant protects pedestrians from glare, in addition to preventing spill light above the horizontal plane.
- Sustainable LED technology offers durability and optimal light output with low power consumption.

Area of Application

Suitable for low / medium public areas.

Available Finish

Pure polyester powder coated

RAL 9004 Signal black

RAL 9007 Grey aluminium

RAL 7016 Anthracite grey

Graphite grey





BOTANICAL GARDEN PARK, GUWAHATI



Technical Specifications

General

ID : 4710 / 4708
 System Wattage : 12W LED
 Driver Integral : Constant Current
 Operating Voltage : 100-277Vac
 Operating Temperature : -15°C~+50°C

Light Source

Light Source : CITIZEN
 CRI (Ra) : >80
 LED Colour Temperature : 2700K / 3000K / 4000K / 6500K

Physical



Body : Square Aluminium Tube with Die-cast Aluminium Base
 Diffuser : Clear Toughened Glass
 Mounting : Surface - Floor
 Finish : Powder coated
 RAL 9004 Signal black
 RAL 9007 Grey aluminium
 RAL 7016 Anthracite grey
 Graphite grey

Driver

Power Supply : Integral
 Input Voltage : 230-240Vac
 Frequency : 50-60 Hz
 Power Factor : >0.9
 THD : <10%
 Surge Protection : 2.5KV
 Efficiency : >80%

Optical Performance

Light Distribution : Symmetrical

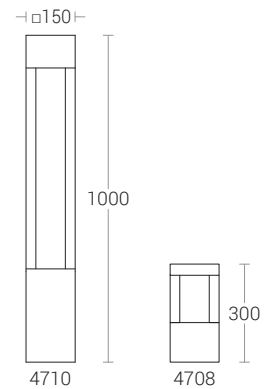

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in