




REVO

MINIMALIST

Revo impresses with its up to 3.5 meters long elegant housing, bringing you more quality light with cost-savings.

Due to its length and low UGR, it delivers a homogenous and efficient distribution of light that enables less luminaires per room. Therefore, it is most suitable for open-space offices, corridors, foyers, conference rooms, institutions and other spacious environments.

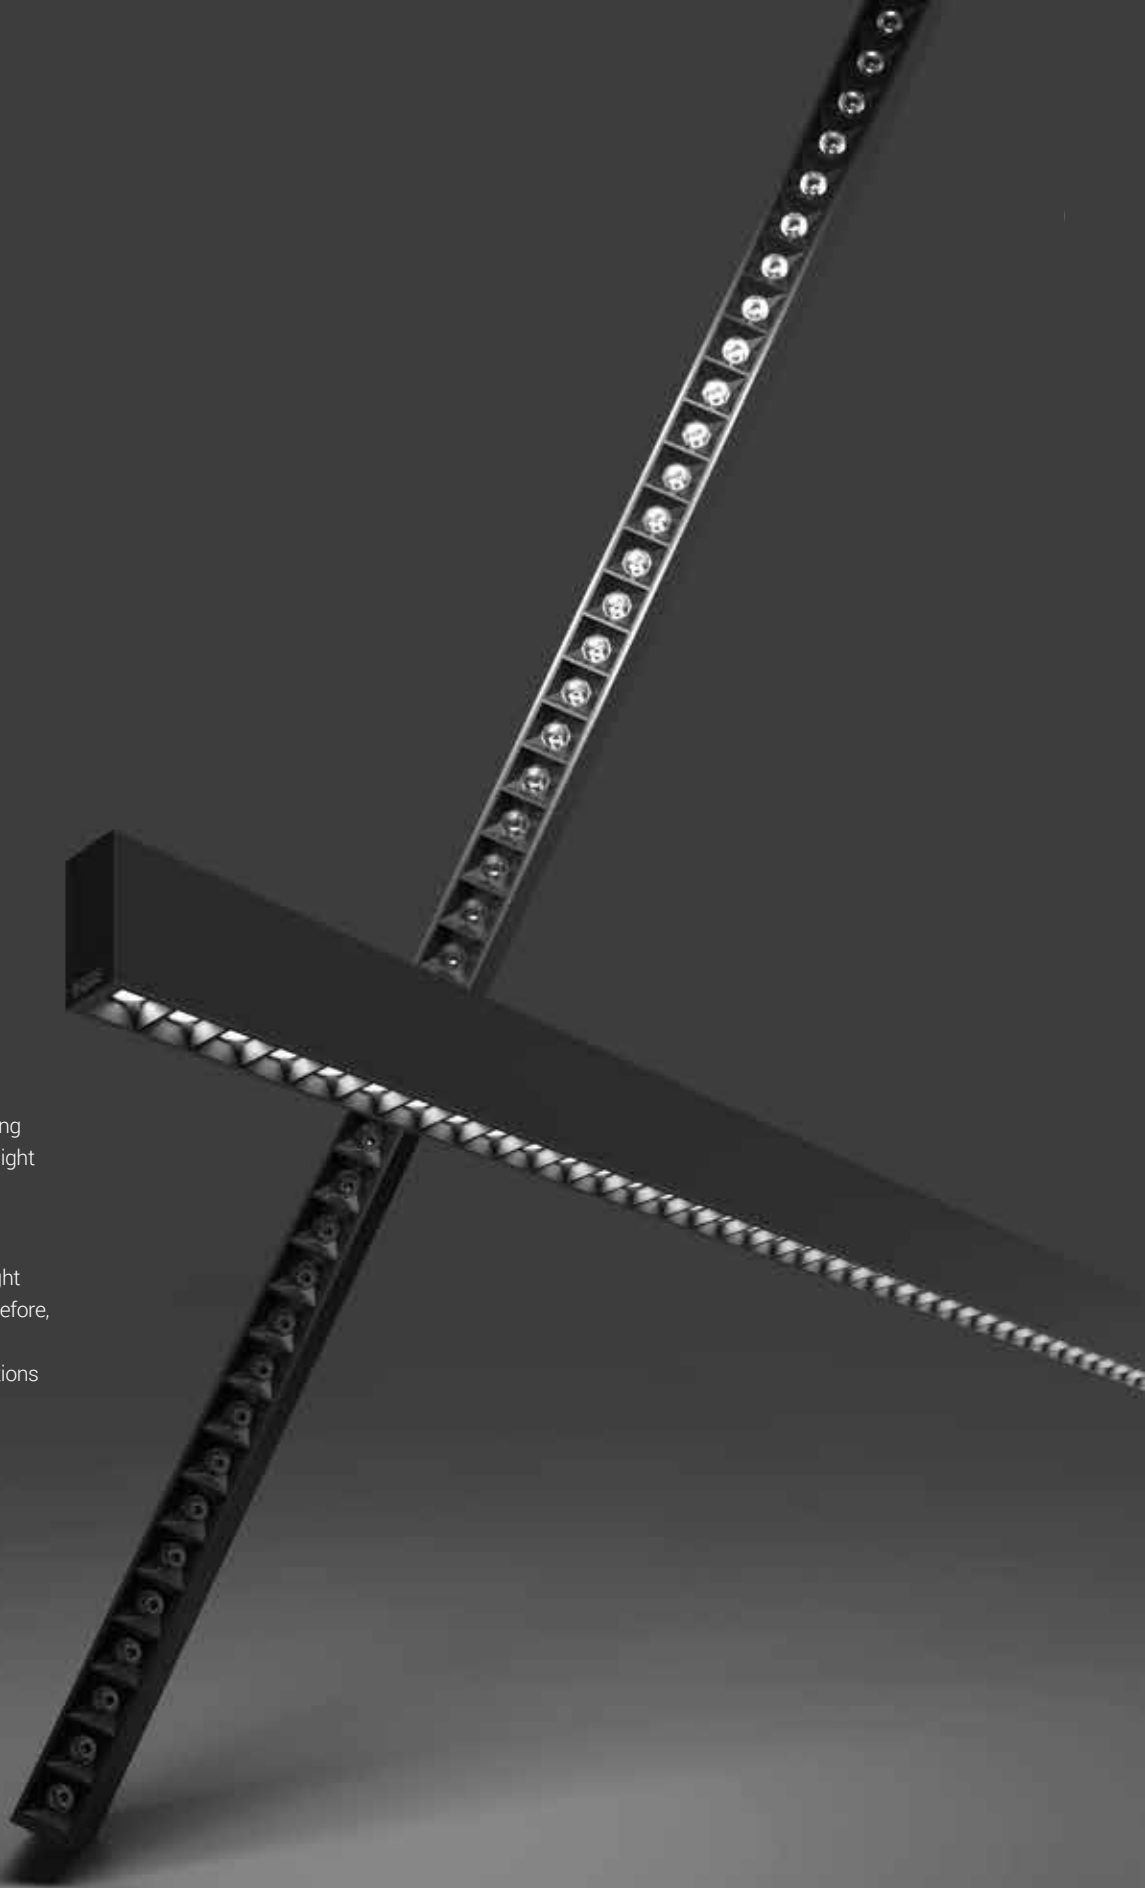

K-LITE

Revo-L

Power : Upto 40W Upto 80W Upto 120W
Length : 1188mm 2365mm 3540mm



Features

- Nichia LED's
- CRI Ra>80 (>90 On Request)
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M (2M available on request)

Options

- CCT : TW 2700K to 5700K



Beam Angle



Accessories




Canopy Kit for Dimmable options

K-LITE

Surface





Pendant Direct

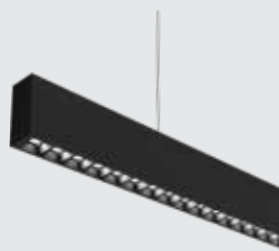

Pendant Direct / Indirect



Dimension in mm

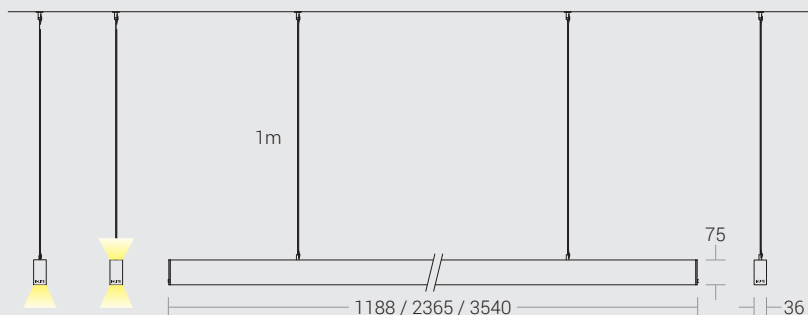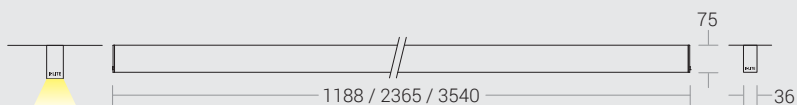

Housing Colour




Extruded aluminium with powder coated finish in
RAL9004 Signal Black fine texture | RAL9016 Traffic White fine texture |
RAL 9007 Grey aluminium fine texture

Light Distribution refer online



D01 - Hexa-Cell

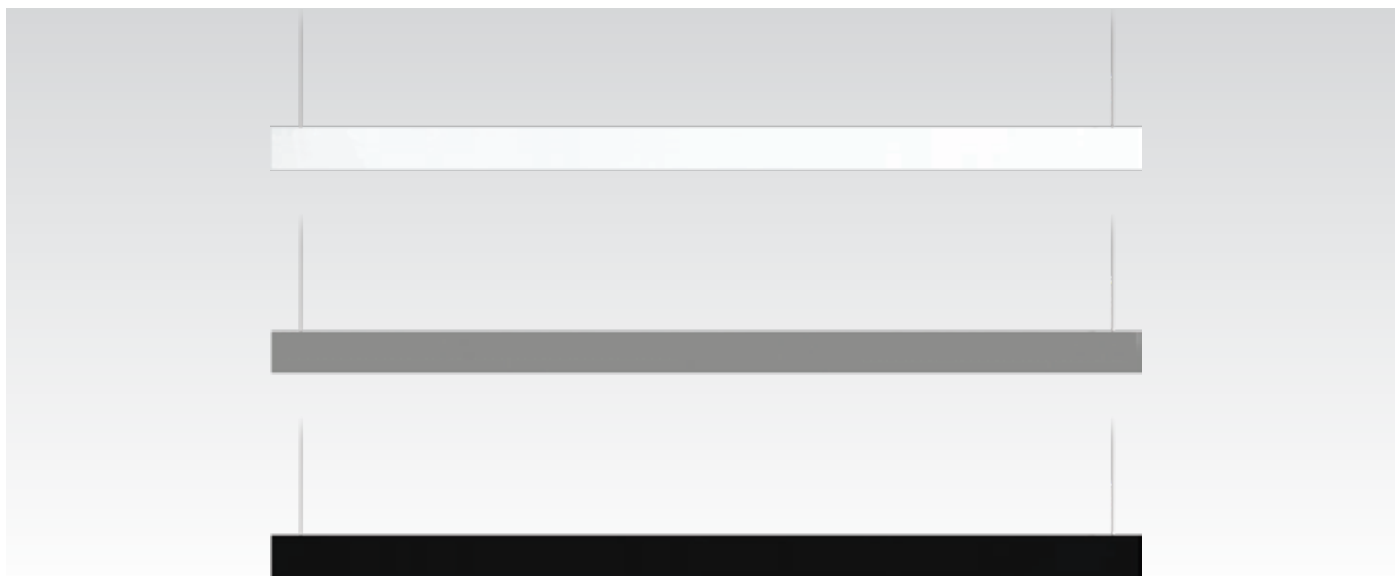

Technical Specifications

General

Driver : Constant Current
 Input Voltage : 220-240Vac
 Operating Temperature : -15°C~+50°C

Light Source

Light Source : Nichia
 CRI (Ra) : >80 (>90 On Request)
 LED Colour Temperature : 2700K / 3000K / 4000K
 5700K

Optical

Efficiency : >90%
 Tilt : Fixed
 Beam Angle : 50°
 Diffuser/Lens Material : Polycarbonate
 Secondary Reflector : Hexa-Cell (Matte Black)
 UGR : <16

Physical

Body : Extruded Aluminium
 with Die-cast Endcaps
 Mounting : Surface / Pendant
 Finish : RAL 9004 Signal black
 RAL 9016 Traffic White
 RAL 9007 Grey aluminium

Driver

Power Supply : Integral
 Power Factor : >0.90
 THD : <10%
 Surge Protection : 4KV-6KV
 Efficiency : >85%



Ordering Guide

Pendant - Direct / Surface

ID	Wattage	Dimension (mm)
3465	Upto 40W	1188 x 36 x 75
3465	Upto 80W	2365 x 36 x 75
3465	Upto 120W	3540 x 36 x 75

Pendant - Direct & Indirect

ID	Wattage	Dimension (mm)
3465	Upto 40W & 15W	1188 x 36 x 75
3465	Upto 80W & 30W	2365 x 36 x 75
3465	Upto 120W & 45W	3540 x 36 x 75