





# REVO

Power : 30W / 40W    60W / 80W    90W  
Length : 1188mm    2365mm    3540mm

## Smart Pendant

REVO is a fresh new lighting solution when projecting the interior of an office or any commercial space. Its high-quality housing in powder coated finish makes it a bold and stylish luminaire, available with various optic solutions ; reflector (modular), opal, prismatic or asymmetric; and direct / indirect light distribution. Used as an individual profile or put together in continuous lines or shapes.



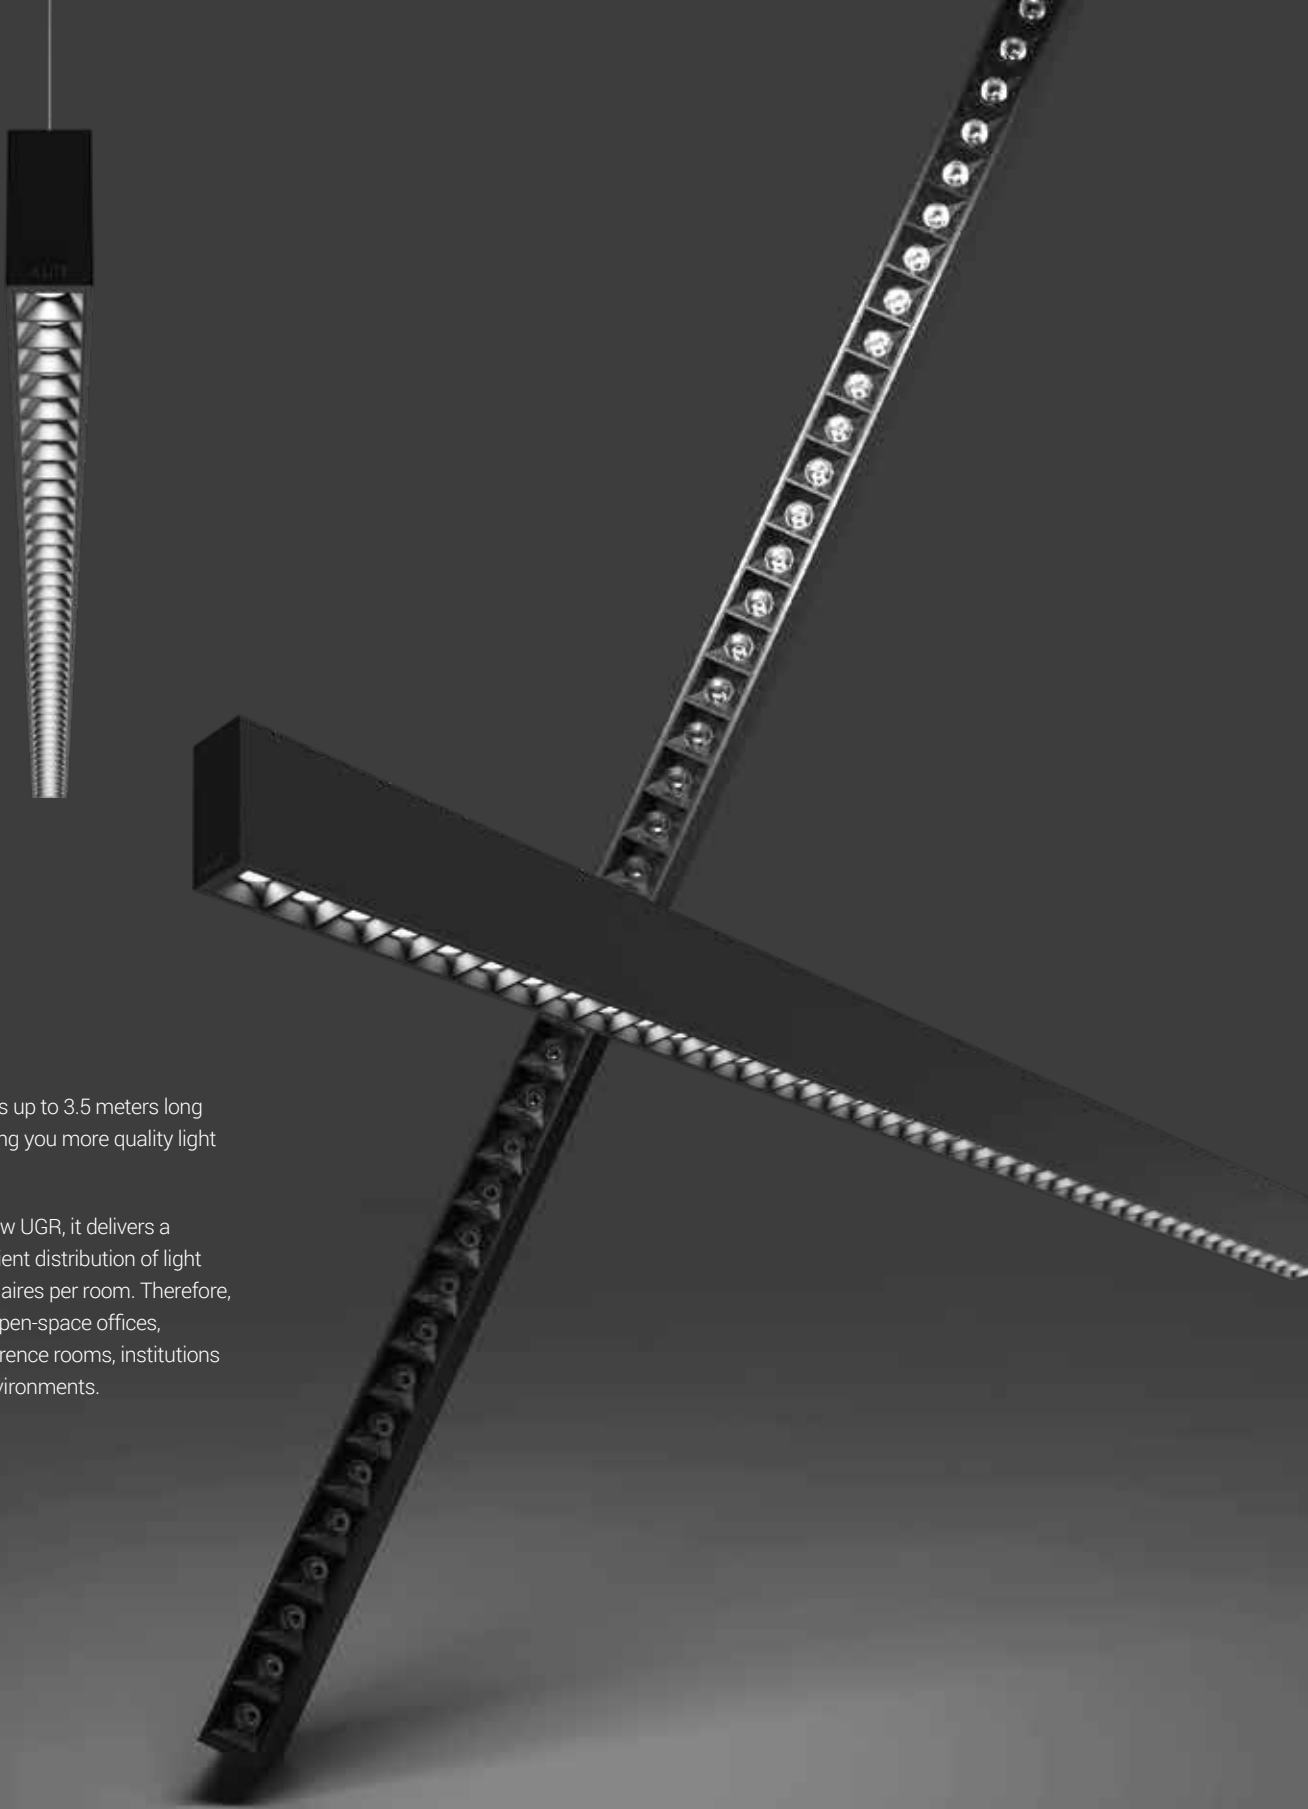


## REVO

### MINIMALIST

Revo impresses with its up to 3.5 meters long elegant housing, bringing you more quality light with cost-savings.

Due to its length and low UGR, it delivers a homogenous and efficient distribution of light that enables less luminaires per room. Therefore, it is most suitable for open-space offices, corridors, foyers, conference rooms, institutions and other spacious environments.

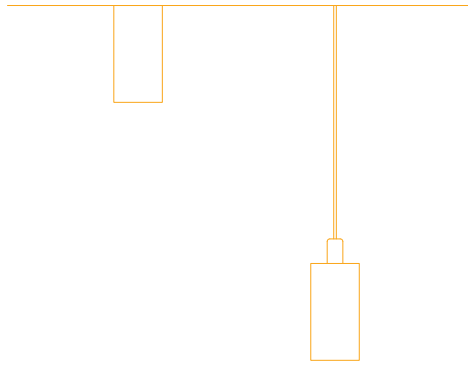

# REVO

## Flexible Design Multiple Applications

Revo luminaire is a versatile solution for projects that demand high quality of the lighting system and high visual comfort. With its modular design, the Revo can be used as an individual fixture or as a combination of luminaires put together in continuous lines.

# K-LITE

## REVO

Power : 30W / 40W    60W / 80W    90W  
 Length : 1188mm    2365mm    3540mm



### Features

- NICHIA LED's
- 3000K / 4000K / 5700K or TW 2700K to 5700K
- Ra>80 (>90 On Request)
- SDCM ≤ 3
- L70 / B10 @ 60,000 Hrs
- Standard suspension kit 1M



### Options


- Through wiring
- Dimmable options



### Beam Angle



### Accessories




#### Canopy Kit

For control unit  
 Bespoke Colour Options

### SURFACE





### PENDANT DIRECT



### PENDANT DIRECT / INDIRECT




### Dimension in mm

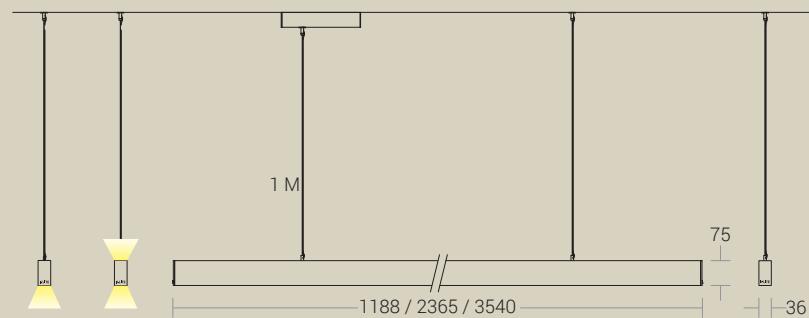


### Housing Colour

- High-quality aluminium with powder coated finish in RAL9005 Black fine texture | RAL9016 White fine texture | RAL9006 Grey fine texture

### Light Distribution

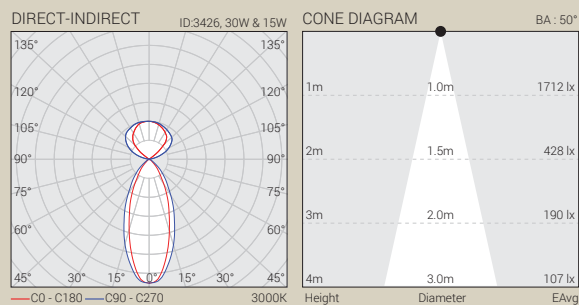

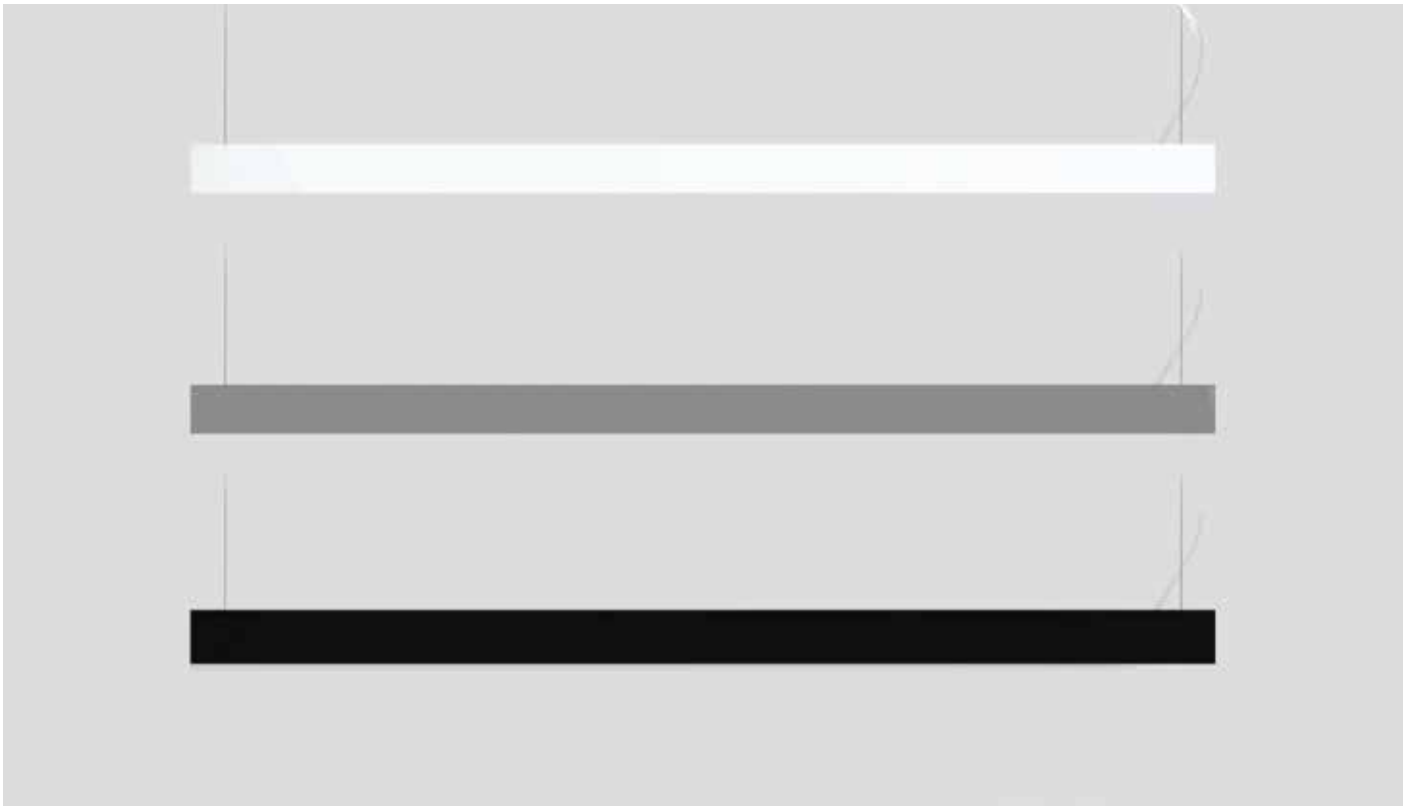

### Technical Specifications

**General**

Driver : Constant Current  
 Input Voltage : 220-240Vac  
 Operating Temperature : +25°C~+55°C

**Light Source**

Light Source : NICHIA  
 CRI (Ra) : >80 (>90 On Request)  
 LED Colour Temperature : 3000K / 4000K / 5700K

**Optical**

Efficiency : >90%  
 Tilt : Fixed  
 Beam Angle : 50°  
 Diffuser/Lens Material : Polycarbonate  
 Secondary Reflector : Hexa-Cell (Matt Black)  
 UGR : <16

**Physical**

Body : High-Grade Aluminium with Die-cast Endcaps  
 Mounting : Surface / Suspended  
 Finish : White(RAL9016)  
 Black(RAL9005)  
 Grey (RAL 9006)

**Driver**

Power Supply : Integral  
 Power Factor : >0.90  
 THD : <10%  
 Surge Protection : 2KV-3KV  
 Efficiency : >85%

### Ordering Guide

**Pendant - Direct**

ID	Wattage	Dimension (mm)
3464	30W	1188 x 36 x 75
3465	40W	1188 x 36 x 75
3466	60W	2365 x 36 x 75
3467	80W	2365 x 36 x 75
3468	90W	3540 x 36 x 75

**Pendant - Direct & Indirect**

ID	Wattage	Dimension (mm)
3426	30W & 15W	1188 x 36 x 75
3427	40W & 15W	1188 x 36 x 75
3446	60W & 30W	2365 x 36 x 75
3447	80W & 30W	2365 x 36 x 75
3448	90W & 40W	3540 x 36 x 75

**Surface Mounted - Direct**

ID	Wattage	Dimension (mm)
3442	30W	1188 x 36 x 75
3443	40W	1188 x 36 x 75
3444	60W	2365 x 36 x 75
3445	80W	2365 x 36 x 75