


# K-LITE

## Line 'n' Dot - Surface

Power: 24W  
Length: 312mm



### Features

- Nichia LED's
- CRI Ra>80 (>90 On Request)
- L70 / B10 @ 60,000 Hrs

### Options

- CCT : TW 2700K to 5700K
- Driver options



D03 : Vaccum Metalized Chrome Finish, UGR <12


### Beam Angle



SURFACE



### Dimension in mm

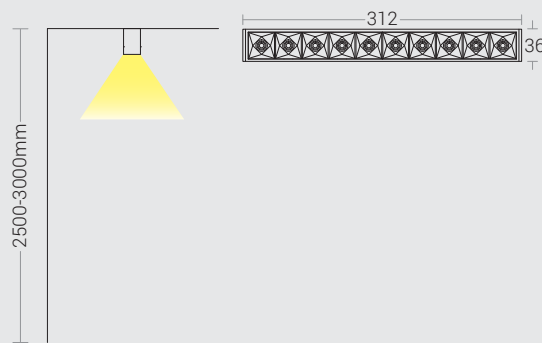

### Housing Colour



High-quality aluminium with powder coated finish in  
RAL9016 Traffic White fine texture | RAL9004 Signal black fine texture |  
RAL9007 Grey aluminium fine texture

Light Distribution refer online



D03



## Technical Specifications

### General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: -15°C~+50°C

### Light Source

Light Source	: NICHIA
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

### Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 12°,20°,34°,48°,60°
Diffuser/Lens Material	: Polycarbonate
Diffuser Finish	: Vacuum Metalized Chrome Finish
UGR	: <12

### Physical

Body	: High-Grade Aluminium with Die-cast Endcaps
Mounting	: Surface Mounted
Finish	: RAL 9016 Traffic White RAL 9004 Signal black RAL 9007 Grey aluminium

### Driver

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 2KV
Efficiency	: >85%
Options	: Dali / Casambi / Phase Cut



## Ordering Guide

### Surface Mounted

ID	Wattage	Dimension (mm)
3431	24W	312 x 36 x 75