

# K-LITE

## POWER WASH

Power : Upto 40W    Upto 80W  
Length : 1214 mm    2400 mm

Upto  
100  
lm/w


### Features

- Bridgelux / Equivalent LED's
- CRI Ra>80 (>90 On Request)
- L70 / B10 @ 50,000 Hrs



### Options



Recess

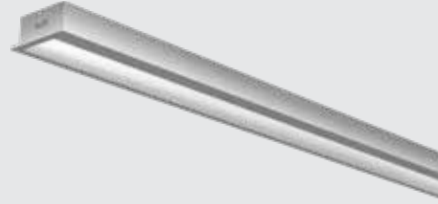

### Dimension in mm



### Housing Colour




Extruded aluminium with powder coated finish in  
RAL9004 Signal Black fine texture | RAL9016 Traffic White fine texture |  
RAL 9007 Grey aluminium fine texture



Open Source

[Light Distribution refer online](#)



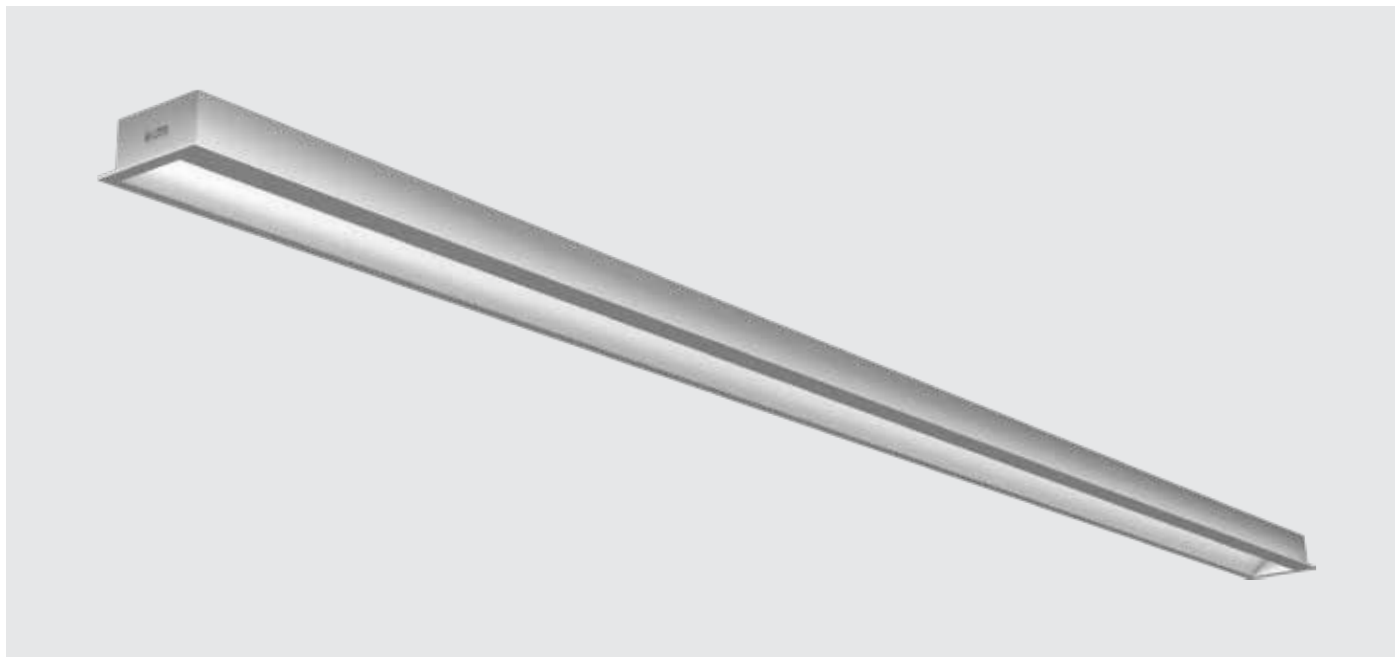

## Technical Specifications

### General

Driver Integrated	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: -15°C~+50°C

### Light Source

Light Source	: Bridgelux / Equivalent
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

### Optical

Tilt	: Fixed
Beam Angle	: 115°
Diffuser Material	: PC Opal / PC Clear
UGR	: <19

### Physical

Body	: Extruded Aluminium with Endcaps
Mounting	: Recess
Finish	: RAL 9004 Signal black RAL 9016 Traffic White RAL 9007 Grey aluminium

### Driver

Power Supply	: Integrated
Power Factor	: >0.95
THD	: <10%
Surge Protection	: Upto 3KV
Efficiency	: >85%



## Ordering Guide

### Recess - Opal / Clear

ID	Wattage	C.O.D	Dimension (mm)
3394	Upto 40W	1205 x 50	1214 x 58 x 27
3394	Upto 80W	2391 x 50	2400 x 58 x 27