

K-LITE

Mini Grazer

Power : Upto 10W Upto 20W Upto 30W Upto 40W
 Length : 520mm 1020mm 1520mm 2020mm

Upto
70
lm/w

Features

- Lumileds LED's
- CRI Ra>80 (>90 On Request)
- L80 / B10 @ 60,000 Hrs
- Standard suspension kit 1M (2M available on request)

Options



Beam Angle




Installation

Ceiling / Floor mounting




Description
 Mounting clips
 Recommended to use every
 500mm.

Pendant



Description
 Adjustable stainless steel
 suspension kit (1 metre)
 available on request.

Wall mounted adjustable




Mounting accessories
 8400
 Adjustable wall clamp mount (±60°)


K-LITE

Mono Colour


RGBW

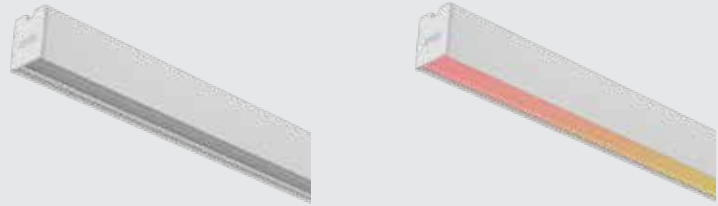

Dimension
in mm

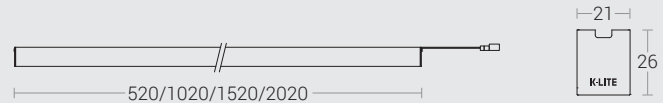

Application Idea

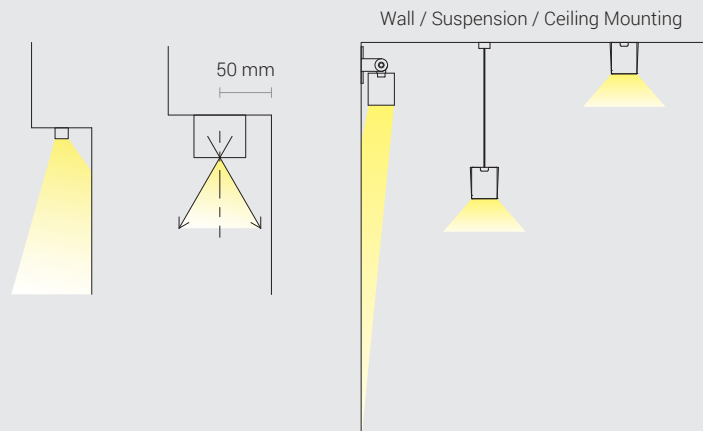



Housing Colour



Extruded aluminium with powder coated finish in
 RAL9004 Signal Black fine texture | RAL9016 Traffic White fine texture

Light
Distribution

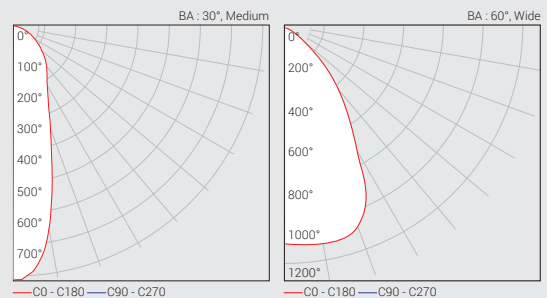

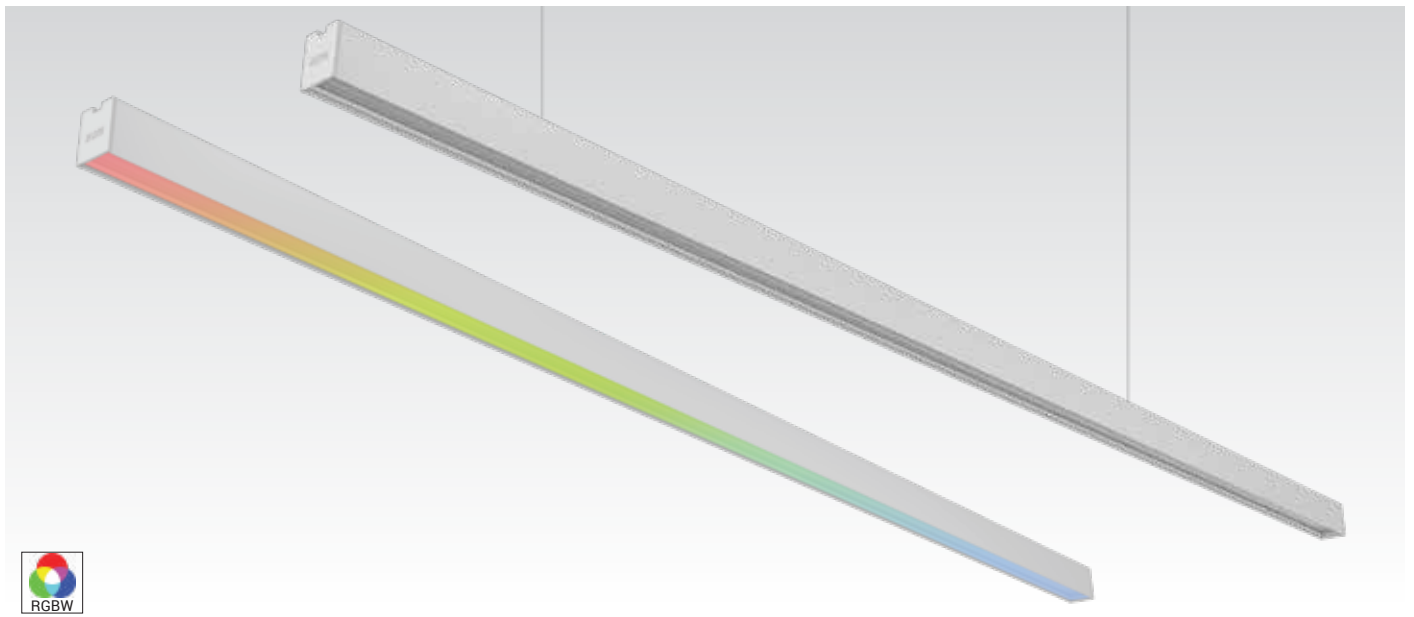

Technical Specifications

General

Driver	: Constant Voltage
Operating Temperature	: -15°C~+50°C
Operating Voltage	: 24Vdc
Power Supply	: Non Integral 24V PSU

Light Source

Light Source	: Lumileds
CRI (Ra)	: >80 (>90 on request)
LED Colour Temperature	: 2700K / 3000K / 4000K 5700K / RGBW

Optical

Tilt	: Fixed
Beam Angle	: 30° / 60°
Luminaire Efficiency	: Upto 70 lm/W / Upto 67 lm/W
Diffuser Material	: Clear PMMA extruded lens

Physical

Body	: Extruded Aluminium with Translucent Endcaps
Mounting	: Surface / Tiltable
Finish	: RAL 9004 Signal black RAL 9016 Traffic White

Specification

Power (W/m)	20W/m
Max.length (m)	2 mts



Ordering Guide

Pendant - Direct / Surface / Surface - RGBW

ID	Wattage	Dimension (mm)
2828	Upto 10W	520 x 21 x 26
2828	Upto 20W	1020 x 21x 26
2828	Upto 30W	1520 x 21x 26
2828	Upto 40W	2020 x 21x 26

Note : Luminaire operating voltage is 24Vdc, to be ordered with suitable power supply, controller and accessories.