



RELIANCE GIR, JUNAGADH, AHMEDABAD

**Technical Specifications**

**General**

ID : 4186 / 4187  
 System Wattage : 1 x 24W / 2 x 24W LED  
 Driver Integral : Constant Current  
 Operating Voltage : 100-277Vac  
 Operating Temperature : -15°C~+50°C

**Light Source**

Light Source : NICHIA  
 CRI (Ra) : ≥80  
 LED Colour Temperature : 2700K / 3000K / 4000K / 5700K

**Physical**

Body : Rectangular Extruded Aluminium Tube with Die-Cast Aluminium  
 Diffuser : Clear acrylic  
 Mounting : Floor - Surface  
 Finish : Powder coated  
 RAL 9004 Signal black  
 RAL 9007 Grey aluminium  
 RAL 7016 Anthracite grey  
 Graphite grey  
 Special Finish : Bamboo / Teak Texture - On Request

**Driver**



Power Supply : Integral  
 Input Voltage : 230-240Vac  
 Frequency : 50-60 Hz  
 Power Factor : >0.95  
 THD : <10%  
 Surge Protection : 2.5KV  
 Efficiency : >85%

**Optical Performance**

Light Distribution : Asymmetrical



Note : No Loop-in / Loop-out arrangement

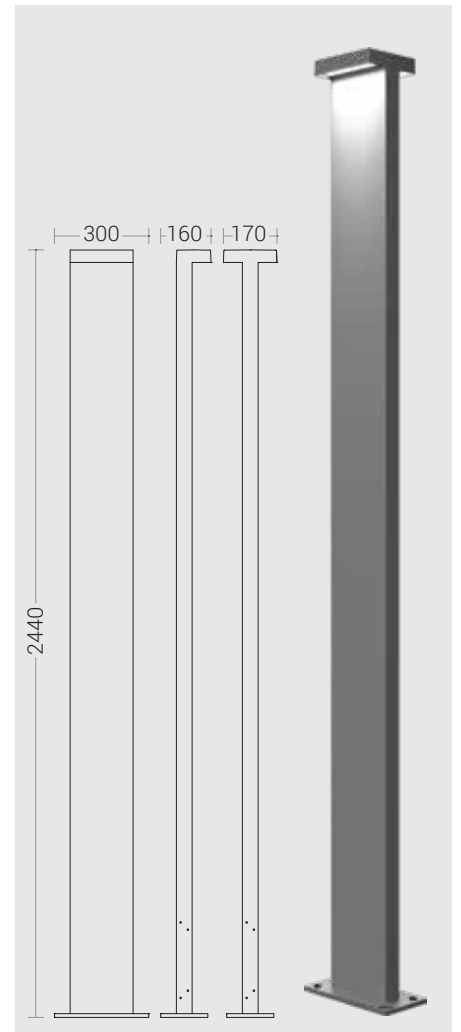

**Note :** It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at [www.klite.in](http://www.klite.in)