



Technical Specifications

General

ID	: 4553
System Wattage	: 3 x 3W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

Light Source

Light Source	: NICHIA
CRI (Ra)	: >80
LED Colour Temperature	: 2700/3000K/4000K/5700K
	Special CCT on request - Amber / Red / Green / Blue

Physical



Body	: Extruded Aluminium Tube
Diffuser	: Clear Acrylic Rod
Mounting	: Surface
Finish	: Powder coated
	RAL 9004 Signal black
	RAL 9007 Grey aluminium
	RAL 7016 Anthracite grey
	Graphite grey
	Special finish on request - Teak / Bamboo

Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.9
THD	: <10%
Surge Protection	: 2KV

Optical Performance

Light Distribution	: Symmetrical
--------------------	---------------

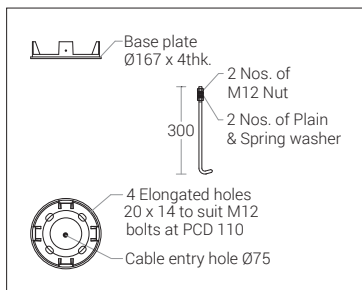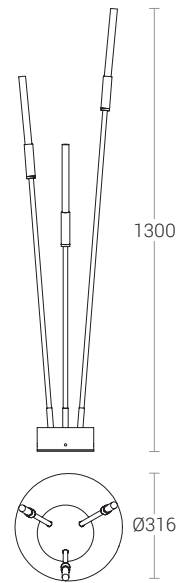

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in