

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: -15°C~+50°C

Light Source

Light Source	: Osram
CRI (Ra)	: >80
R9	: >50
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Optical

Tilt	: 10°
Beam Angle	: 6°
Diffuser Material	: Polycarbonate
Secondary optics	: Elliptical Optical Polymer
UGR	: <19

Physical

Body	: Aluminium profile
Mounting	: Surface Mounted as continuous band of light
Diffuser	: Secondary optics made optical polymer
Fixing Clip	: Metal, Black powder coated

Driver


Power Supply	: Integral
Power Factor	: >0.9 - >0.97
THD	: <10%
Surge Protection	: 4KV
Efficiency	: >85%



Ordering Guide

Surface

ID	Wattage	Dimension (mm)
3384	Upto 18W	610 x 53 x 71
3384	Upto 36W	1210 x 53 x 71
3384	Upto 72W	2410 x 53 x 71

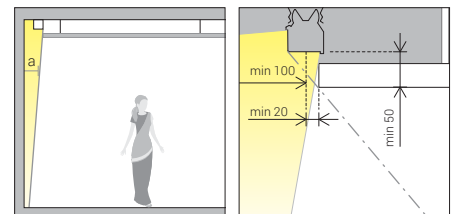

Excellent visual comfort

Due to the small installation dimensions of Power Graze, the luminaires remain concealed and thus support ideal visual comfort. Asymmetrical light distribution, this wall grazer can be positioned up to 10cm close to the wall and still produce an exceptionally uniform beam for ceiling height upto 10mtrs height.