



OPEN SOURCE

Technical Specifications

General

ID	: 3398
System Wattage	: 10W/m
LED Count	: 144 LEDs/m
Cutting Unit	: 12 LEDs
Cutting Unit Length	: 83.3 mm
Minimum Bend Dia	: 120 mm
Driver Non-Integral	: Constant Voltage
Operating Voltage	: 24Vdc
Operating Temperature	: -40°C to 55°C

Light Source

Light Source	: SMD 3528
CRI (Ra)	: >90
LED Colour Temperature	: 2700K / 3000K (Other CCTs on request)
LED Life Time	: 70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C

Driver


Power Supply	: Non - Integral
--------------	------------------

Optical Performance


Beam Angle	: 120°
Max Run Length*	
Single Feed	: 10 m
Double Feed	: 20 m

Physical

Body	: Silicone - Top Bend
Mounting	: Aluminium Channel, SS Clamp, SS flexible channel

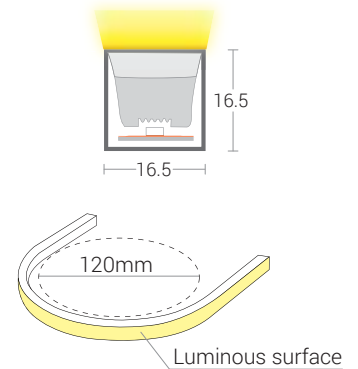


Min. Bending Diameter




Vertical Bending


Illuminance Distribution

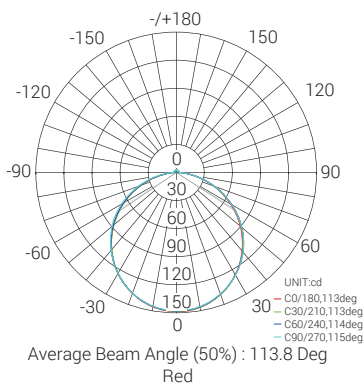

Cone Diagram

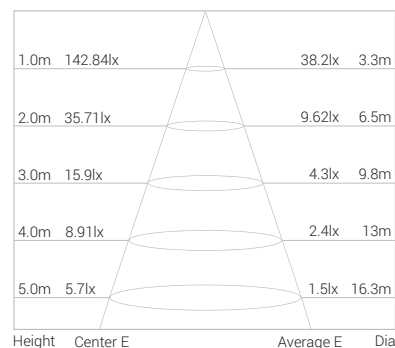

White Colour Chart

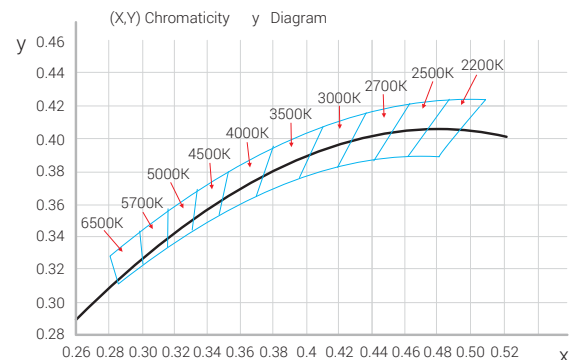



OPEN SOURCE

Technical Specifications

General

ID	: 3398
System Wattage	: 18W/m
LED Count	: 70 LEDs/m
Cutting Unit	: 7 LEDs
Cutting Unit Length	: 100 mm
Minimum Bend Dia	: 120 mm
Driver Non-Integral	: Constant Voltage
Operating Voltage	: 24Vdc
Operating Temperature	: -40°C to 55°C

Physical

Body	: Silicone - Top Bend
Mounting	: Aluminium Channel, SS Clamp, SS flexible channel

Light Source



Light Source	: SMD 5050
LED Colour Temperature	: RGBW (W-2700K / 3000K)
Working Mode	: DMX (RS485)
Pixels Quantity	: 10 Pixel/m
IC Chips	: UCS512
LED Life Time	: 70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C

Driver


Power Supply	: Non - Integral
--------------	------------------

Optical Performance

Beam Angle	: 120°
Max Run Length*	
Single Feed	: 8 m
Double Feed	: 16 m




Min. Bending Diameter



Vertical Bending



Illuminance Distribution

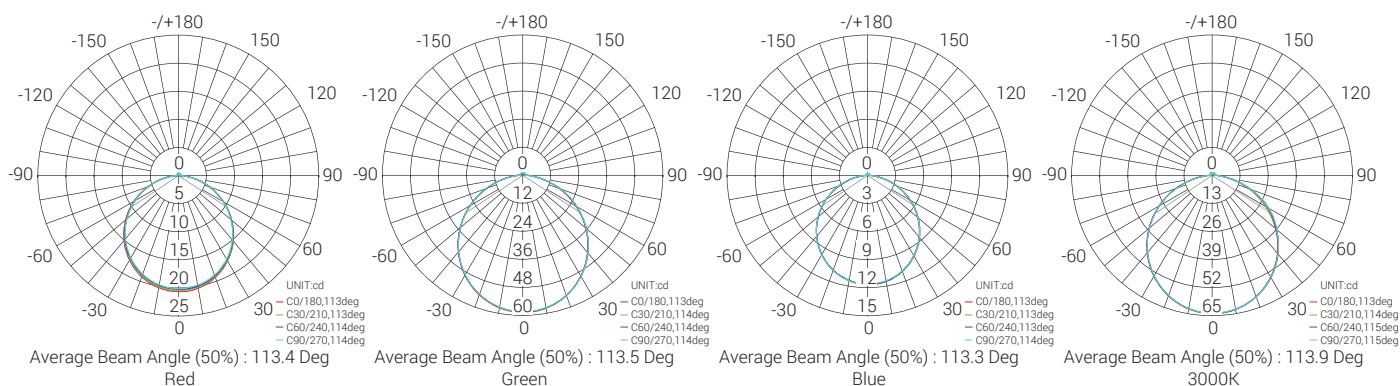



OPEN SOURCE

Technical Specifications

General

ID	: 3398
System Wattage	: 18W/m
LED Count	: 70 LEDs/m
Cutting Unit	: 7 LEDs
Cutting Unit Length	: 100 mm
Minimum Bend Dia	: 120 mm
Driver Non-Integral	: Constant Voltage
Operating Voltage	: 24Vdc
Operating Temperature	: -40°C to 55°C

Physical

Body	: Silicone - Top Bend
Mounting	: Aluminium Channel, SS Clamp, SS flexible channel

Light Source


Light Source	: SMD 5050
LED Colour Temperature	: RGBW (W-3000K)
Working Mode	: SPI
Pixels Quantity	: 10 Pixel/m
IC Chips	: UCS8904
LED Life Time	: 70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C

Driver


Power Supply	: Non - Integral
--------------	------------------

Optical Performance

Beam Angle	: 120°
Max Run Length*	
Single Feed	: 8 m
Double Feed	: 16 m

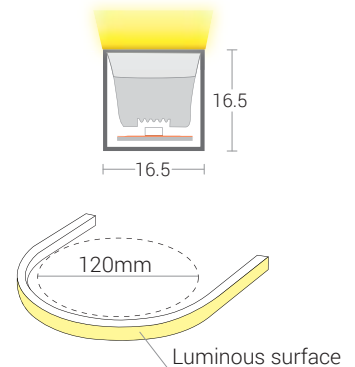

Min. Bending Diameter



Illuminance Distribution

