


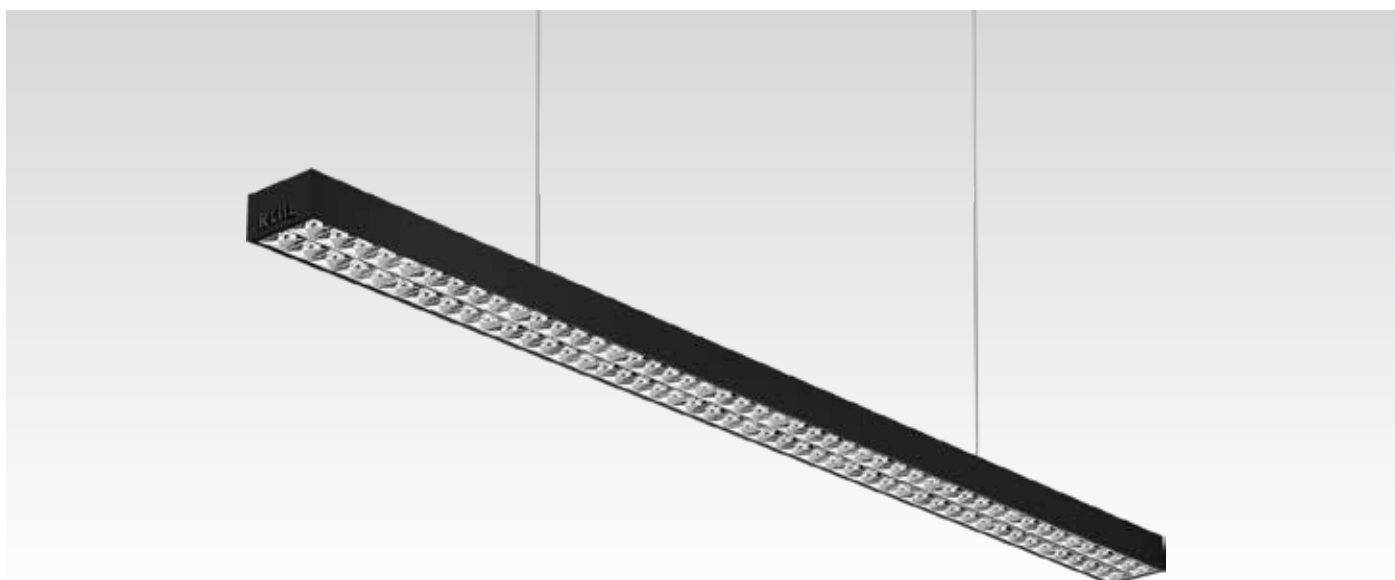

Technical Specifications

General

Driver	: Constant Current
Input Voltage	: 220-240Vac
Operating Temperature	: -15°C~+50°C

Light Source

Light Source	: Nichia
CRI (Ra)	: >80 (>90 On Request)
LED Colour Temperature	: 2700K / 3000K / 4000K 5700K

Optical

Efficiency	: >90%
Tilt	: Fixed
Beam Angle	: 12°, 20°, 34°, 48°, 60°
Diffuser/Lens Material	: Polycarbonate
Secondary Reflector	: Vacuum Metalized Chrome Finish

UGR	: <12
-----	-------

Physical

Body	: Extruded Aluminium with Die-cast Endcaps
Mounting	: Pendant
Finish	: RAL 9004 Signal black RAL 9016 Traffic White RAL 9007 Grey aluminium

Driver

Power Supply	: Integral
Power Factor	: >0.90
THD	: <10%
Surge Protection	: Upto 3KV
Efficiency	: >85%



Ordering Guide

Pendant - Direct

ID	Wattage	Dimension (mm)
3474	Upto 40W	612 x 66 x 37
3474	Upto 80W	1212 x 66 x 37

Pendant - Direct-Indirect

ID	Wattage	Dimension (mm)
3474	Upto 40W & 20W	612 x 66 x 37
3474	Upto 80W & 40W	1212 x 66 x 37