



KATHIRARA URBAN SQUARE, CHENNAI

Technical Specifications

General

ID	: 3925
System Wattage	: 18W LED
Driver Non-Integral	: Constant Voltage
Operating Voltage	: 24Vdc
Operating Temperature	: -15°C~+50°C

Physical

Body	: 6063 Aluminium Alloy
Diffuser	: Toughened Glass
Mounting	: Surface - Bracket

Light Source


Light Source	: CREE / OSRAM
CRI (Ra)	: ≥80
LED Colour Temperature	: 2700K / 3000K / 4000K / 5700K

Driver





Power Supply	: Non Integral
--------------	----------------

Optical Performance

Beam Angle	: 12° / 15° x 60°
------------	-------------------

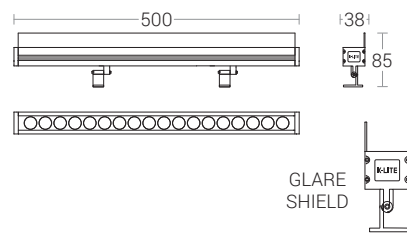

Accessory



IP67 End Cap Male / Female Connectors - 2P

IP67 Jumper Cable 2P - 1M

IP67 Leader Cable Male / Female IP67 Y-Connector Cable 2P - 0.1M 2P - 0.5M