




STATUE OF EQUALITY RAMANUJA, HYDERABAD

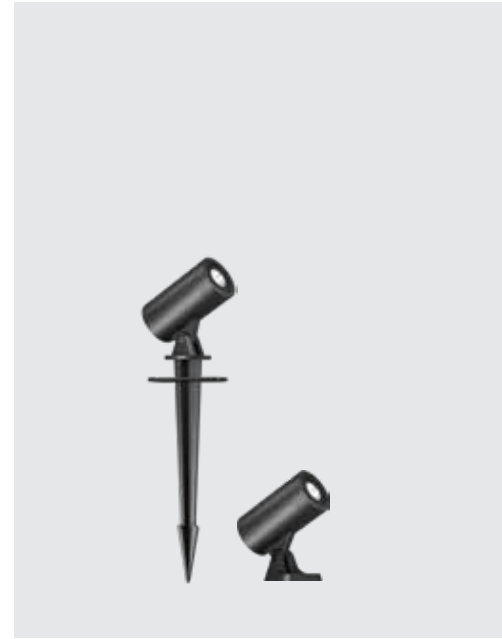

Technical Specifications

General

ID	: 4265 / 4266
System Wattage	: 6W LED
Driver Non-Integral	: Constant Voltage
Operating Voltage	: 24Vdc
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-cast Aluminium Alloy
Diffuser	: Clear Toughened Glass
Mounting	: Spike / Die-cast Aluminium Bracket
Finish	: Powder coated RAL 9004 Signal black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Light Source




Light Source	: LUMILEDS
CRI (Ra)	: ≥80
LED Colour Temperature	: 2700K, 3000K, 4000K 5700K

Driver

Power Supply	: Non-Integral
--------------	----------------

Optical Performance


Beam Angle	: 15° / 25° / 40°
------------	-------------------

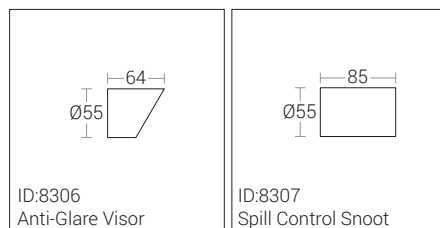

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in



STATUE OF EQUALITY RAMANUJA, HYDERABAD

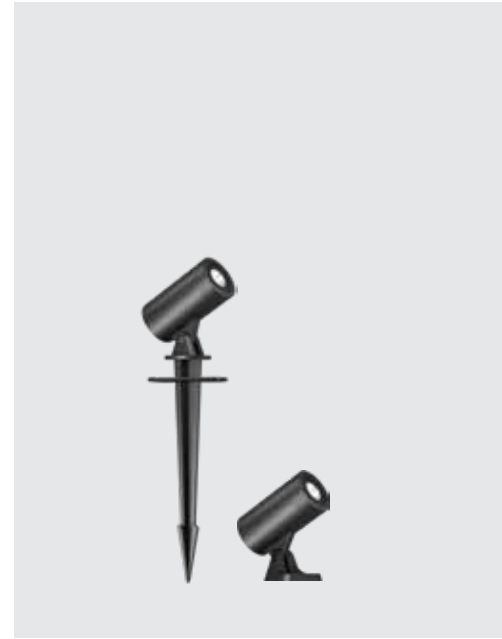

Technical Specifications

General

ID	: 4265 / 4266
System Wattage	: 6W LED
Driver Integral	: Constant Current
Operating Voltage	: 150-270Vac
Operating Temperature	: -15°C~+50°C

Physical

Body	: Die-cast Aluminium Alloy
Diffuser	: Clear Toughened Glass
Mounting	: Spike / Die-cast Aluminium Bracket
Finish	: Powder coated RAL 9004 Signal black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

Light Source


Light Source	: LUMILEDS
CRI (Ra)	: ≥80
LED Colour Temperature	: 2700K, 3000K, 4000K 5700K

Driver


Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz

Optical Performance

Beam Angle	: 15° / 25° / 40°
------------	-------------------

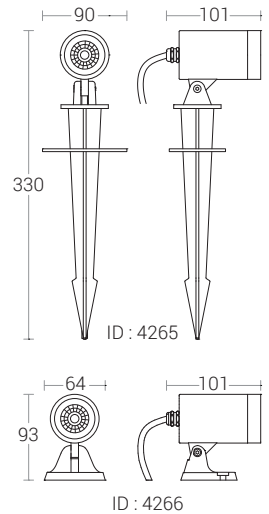

Cone Diagram

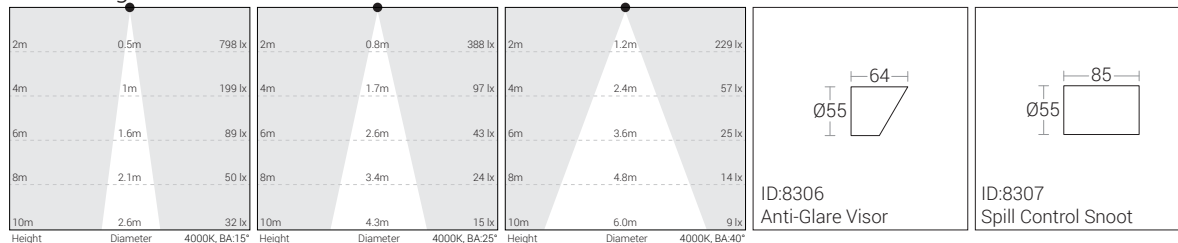

Note : It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at www.klite.in