



MAA SAMALESWARI TEMPLE, ODISHA



## Technical Specifications

### General

ID	: 4718 / 4719
System Wattage	: 12W LED
Driver Integral	: Constant Current
Operating Voltage	: 100-277Vac
Operating Temperature	: -15°C~+50°C

### Physical

Body	: Die-Cast Aluminium with Extruded Aluminium Tube
Diffuser	: Clear Toughened Glass
Gasket	: Silicone
Mounting	: Surface
Finish	: Powder coated RAL 9004 Signal black RAL 9007 Grey aluminium RAL 7016 Anthracite grey Graphite grey

### Light Source



Light Source	: CITIZEN
CRI (Ra)	: >80
LED Colour Temperature	: 2700K / 3000K / 4000K / 6500K

### Driver

Power Supply	: Integral
Input Voltage	: 230-240Vac
Frequency	: 50-60 Hz
Power Factor	: >0.90
THD	: <10%
Surge Protection	: 2.5kV
Efficiency	: >80%

### Optical Performance

Light Distribution	: Symmetrical
--------------------	---------------

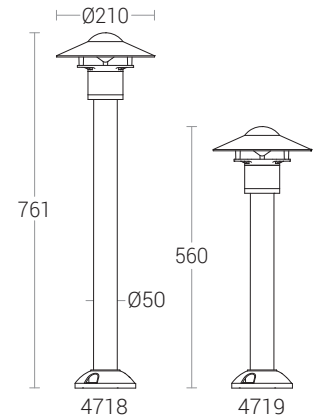

**Note :** It is our constant endeavor to upgrade the performance of our products. For the latest technical information, IES files and product updates please refer to the website at [www.klite.in](http://www.klite.in)